

PD6 Series

Rugged Digital Radio



- GPS Option and Integration with Data Applications
- Durable and Feature-Rich in an Innovative, Compact Design



PD682

PD662

PD602



PD6 Series

The PD6 Series is an open-standard DMR radio rich in features for both voice and data communication in a design approved to rigorous IP67 and MIL-STD 810 testing. It is the ideal solution for organizations looking for an affordable migration from analog to digital technology. The Hytera-patented pseudo-trunking maximizes channel usage. The PD6 Series G also comes with an optional GPS chip that allows the radio to integrate with Hytera Dispatch System or other 3rd party GPS dispatching software.

Applications

Construction

Education

Hospital





Hotel

Security

Factories

Farming


Forestry

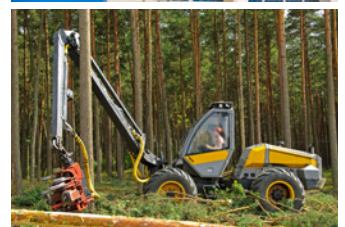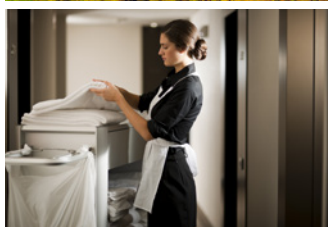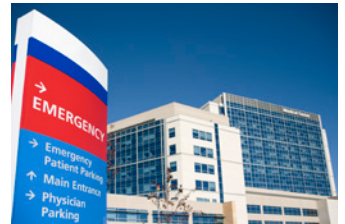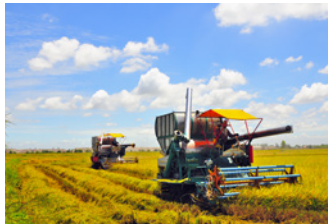


Product Features

- Smaller, Sleeker, Lighter**
 The PD6 Series has a light weight PC & Metal frame design. P602 is 4.7 x 2.13 x 1.1 inches weighing 10.23oz, PD662 / PD682 is 4.8 x 2.17 x 1.1 inches weighing 10.93oz.
- Rugged & Reliable**
 Complies with MIL-STD-810 C/D/E/F/G standards and passes HALT (Highly Accelerated Life Test).
- Wider Available Frequency Range**
 Expanded frequency range of 400-527MHz.
- Dual Mode: Analog & Digital**
 Dual mode (analog & digital) operation ensures a smooth analog to digital migration.
- Secure Communication**
 Allows basic/advanced digital encryption and Scrambler feature in analog mode.
- Advanced Signaling**
 Supports multiple advanced analog signaling modes, including HDC1200, 2-Tone and 5-Tone, providing better integration into existing analog radio fleets.
- DMRA Data Service**
 The data protocol is fully compliant to DMRA standard.
- Pseudo Trunk**
 This virtual trunking feature allocates a free timeslot for urgent communications. This effectively enhances frequency efficiency and allows you to communicate in a timely manner in emergency situations. See example below.
- GPS Positioning (Factory Option)**
 The built-in GPS module in the PD6 series G supports GIS applications.
- Man Down (Factory Option)**
 When a user falls down, the radio can automatically alert others.
- Further Development Port**
 The reserved side port allows users or any third party partner to further develop other helpful applications to extend radio functionalities.
- One Touch Call/Text**
 Supports One Touch features that comprise of Preprogrammed Text Messages, Voice Calls and Supplementary Features.
- Supplementary Features**
 PD6 Series can decode radio enable, radio disable, and remoter monitor as well as Priority Interrupt.
- Radio Priority-Based Interruption (Factory Option)**
 Enables an administration or manager radio to interrupt calls for emergency or urgent communication.
- IP67 Protection**
 The Ingress Protection reaches IP67 (6: Totally protected against dust; 7: Protected against the effects of immersion up to 1m for 30 minutes). It's the highest IP level for land-based wireless radio application.
- DMO True 2-Slot / DMRA Direct Mode**
 In Directmode Hytera can provide 2-slot communication, which allows for 2 talk paths on 1 frequency. See example below.

Slot 1, Slot 2 are automatically assigned to voice call 1 or voice call 2

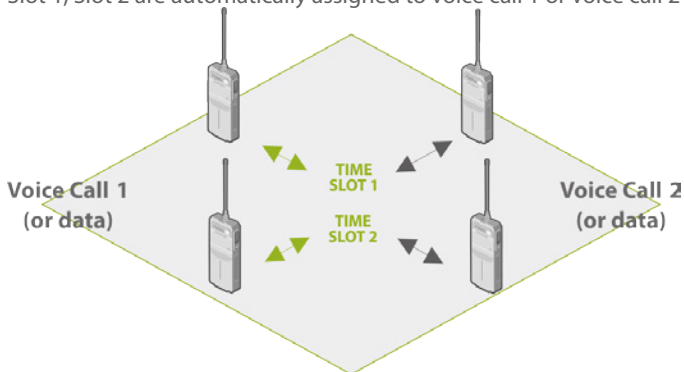

Slot 1 is used for voice call, Slot 2 is used for voice call 2

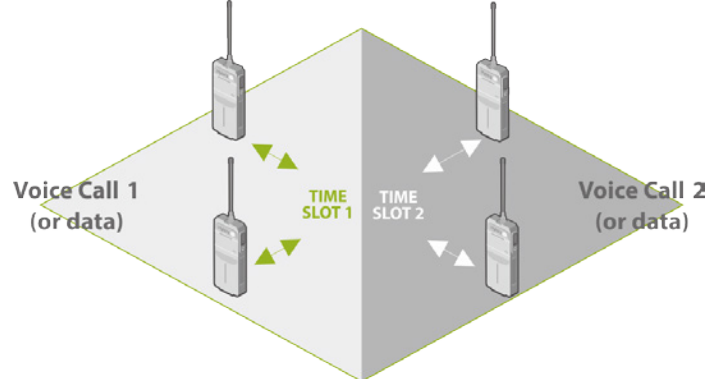

Accessories

Included

- Li-Ion Battery
- MCU Rapid-rate Charger
- Power Adapter
- Antenna
- Belt Clip

Optional



Detachable Earpiece with Transparent Acoustic Tube EHN22



MCU Multi-Unit Charger (for Thick Battery) MCA08



Programming Cable (USB Port) PC45



Battery 2000mAh (Li-Ion) BL2010

See website for full list

Specifications

| | | | |
|--------------------|---------------------------|--|-------------------------|
| General | Frequency Range | VHF: 136 - 174MHz UHF: 400 - 527MHz | |
| | Channel Capacity | PD602 | 32 |
| | | PD662 PD682 | 1024 |
| | Zone Capacity | PD602 | 3 |
| | | PD662 PD682 | 64 |
| | Channel Spacing | 25 / 20 / 12.5KHz | |
| | Operating Voltage | 7.4V | |
| | Battery | 1500mAh (Li-Ion) | |
| | Battery Life (5/5/90) | Analog | Approx. 11hrs |
| | | Digital | Approx. 16hrs |
| | Frequency Stability | ±0.5ppm | |
| | Antenna Impedance | 50 Ω | |
| | Dimensions (HxWxD) | PD602 | 4.7 x 2.13 x 1.1 inches |
| | | PD662 PD682 | 4.8 x 2.17 x 1.1 inches |
| Weight | PD602 | 10.23oz | |
| | PD662 PD682 | 10.93oz | |
| FCC ID | See website for full list | | |
| Industry Canada ID | See website for full list | | |

| | | |
|------------------------------|----------------------------|--|
| Environmental Specifications | Operating Temperature | -22° F ~ +140° F |
| | Storage Temperature | -40° F ~ +185° F |
| | ESD | IEC 61000 - 4 - 2 (level 4) ±8kV(contact) ; ±15kV (air) |
| | American Military Standard | MIL-STD-810 C/D/E/F/G |
| | Dust & Water Intrusion | IP67 Standard |
| | Humidity | Per MIL-STD-810 C/D/E/F/G Standard |
| | Shock & Vibration | Per MIL-STD-810 C/D/E/F/G Standard |

| | | |
|-----|-------------------------------------|-------------|
| GPS | TTFF (Time To First Fix) Cold Start | <1 minute |
| | TTFF (Time To First Fix) Hot Start | <10 seconds |
| | Horizontal Accuracy | <10 meters |

| | | |
|-------------|--|--|
| Transmitter | RF Power Output | VHF: High 5W - Low 1W UHF: High 4W - Low 1W |
| | FM Modulation (Analog Emissions Designator) | 11K φF3E @ 12.5KHz; 14KφF3E @ 20KHz; 16KφF3E @ 25KHz |
| | 4FSK Digital Modulation (Digital Emissions Designator) | 12.5KHz Data Only: 7K6φFXD 12.5KHz Data & Voice: 7KφFXW |
| | Conducted/Radiated Emission | -36dBm<1GHz -30dBm>1GHz |
| | Modulation Limiting | ±2.5KHz @ 12.5KHz; ±4.0KHz @ 20KHz; ±5.0KHz @ 25KHz |
| | FM Hum & Noise | 40dB @ 12.5KHz; 43dB @ 20KHz; 45dB @ 25KHz |
| | Adjacent Channel Power | 60dB @ 12.5KHz 70dB @ 20/25KHz |
| | Audio Response | +1 ~ -3dB |
| | Audio Distortion | ≤ 3% |
| | Digital Vocoder Type | AMBE++ or SELP |
| | Digital Protocol | ETSI-TS102 361-1, 2&3 |

| | | | |
|-----------------------------|--|--|--|
| Receiver | Sensitivity | Analog | 0.22 μ V (12dB SINAD); 0.22 μ V (Typical) (12dB SINAD); 0.4 μ V (20dB SINAD) |
| | | Digital | 0.22 μ V/BER5% |
| | Selectivity TIA-603 ETSI | 60dB @ 12.5KHz / 70dB @ 20/25KHz 60dB @ 12.5KHz / 70dB @ 20/25KHz | |
| | Intermodulation TIA-603 ETSI | 70dB @ 12.5/20/25KHz 65dB @ 12.5/20/25KHz | |
| | Spurious Response Rejection TIA-603 ETSI | 70dB @ 12.5/20/25KHz 70dB @ 12.5/20/25KHz | |
| | Blocking TIA-603 ETSI | 90dB 84dB | |
| | S/N | 40dB @ 12.5KHz; 43dB @ 20KHz; 45dB @ 25KHz | |
| | Rated Audio Distortion | ≤ 3% | |
| Audio Response | +1 ~ -3dB | | |
| Conducted Spurious Emission | < -57dBm | | |

Your Local Dealer

For more information, please contact

OSI International, LLC
164 West Royal Palm Road
Boca Raton, FL 33432
Sales: (866) 394-9508
Fax: (561) 394-9354
Web: www.osiinternational.com
Email: info@osiinternational.net

20KHz / 25KHz will not be available on new equipment in the U.S. after January 1st, 2011

Hytera reserves the right to change product designs or specifications at any time. If you have any questions regarding the accuracy of this information please contact your local sales representative or Hytera directly.

Hytera are registered trademarks of Hytera Co., Ltd. © 2013 Hytera Co., Ltd. All rights reserved.



Hytera America

Address: 3315 Commerce Parkway
Miramar, Florida 33025, USA
Tel: 800-845-1230 Fax: 954-846-1672
<http://www.hytera.us>

